







Stationair

Wipline 3450

Wipline 3450





51 K

Wipline 3450



**N908EN**


*Stationair*









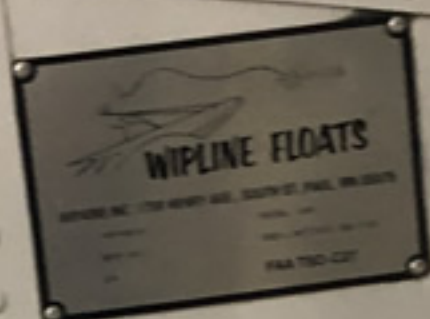

# WIPLINE FLOATS

WIPLINE INC. 1700 KENNY AVE. SOUTH ST. PAUL, MINN. 55105

PHONE

FAX

TELETYPE

MAILING LIST

SALES

SALES 770-1207









*Wipline 3450*




























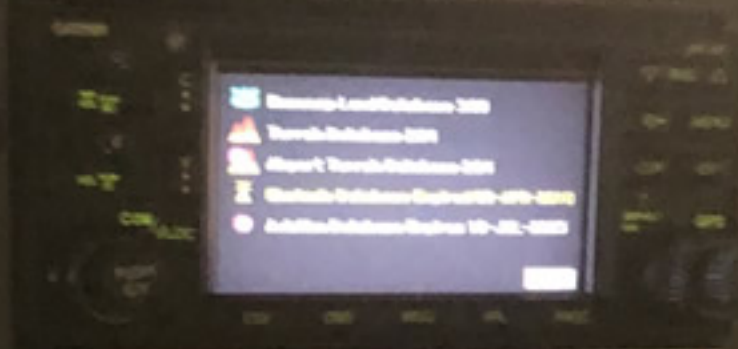



N908

**WARNING:**

ASSURE THAT ALL CONTAMINANTS, INCLUDING, WATER ARE REMOVED FROM FUEL AND FUEL SYSTEM BEFORE FLIGHT. FAILURE TO ASSURE CONTAMINANT FREE FUEL AND HEED ALL SAFETY INSTRUCTIONS AND OWNER ADVISORIES PRIOR TO FLIGHT CAN RESULT IN BODILY INJURY OR DEATH.



WINTERIZATION KIT MUST BE REMOVED WHEN OUTSIDE AIR TEMPERATURE IS ABOVE 20° F.



**WARNING:** PILOT HEATER MUST BE ON WHEN OPERATING BELOW 40° F IN INSTRUMENT METEOROLOGICAL CONDITIONS.



**WARNING:** ASSURE TH LATCHED IN POSITION PRIOR TO TAKE OFF AND LANDING. FAILURE TO DO SO CAN RESULT IN BODILY INJURY OR DEATH.

MANEUVERING SPEED  
125 KIAS





01.00.00 1.00.00 00.00

SMOKING PROHIBITED

Runway Land Database 200  
Terrain Database 200  
Airport Terrain Database 200  
Obstacle Database Expiry 00-APR-2010  
Aviation Database Expiry 10-JUL-2009

IPOD  
VOLUME



12190 11830 | 11260 11495

013 0305

29.79

12190 11830 | 11260 11495





MAP LIGHT DIM

NOSE LEFT  
BUDDER TRIM



MIX  
PULL  
LEAN



CABIN HEAT  
PULL ON

CABIN AIR  
PULL ON

NOSE  
DOWN  
NOSE  
UP

EMERGENCY HANDPUMP  
PULL BEAR MOTOR CIRCUIT BREAKER  
SELECT BEARING BEAR POSITION  
PUMP BEAR TO BEARING POSITION



FUEL  
SELECTOR







1. ROTATE FORWARD CARGO DOOR HANDLE FULL FORWARD THEN FULL AFT.
2. OPEN FORWARD CARGO DOOR AS FAR AS POSSIBLE.
3. ROTATE RED LEVER IN REAR CARGO DOOR FORWARD.
4. FORCE REAR CARGO DOOR FULL OPEN.





















